

3.8V--32V Vin, 3-A Synchronous Buck Converter with EMI Reduction

FEATURES

- EMI Reduction with Switching Node Ringing-free
- 400kHz Switching Frequency with 6% Frequency Spread Spectrum
- 3.8V-32V Wide Input Voltage Range
- Adjustable Output Voltage
- Up to 3A Continuous Output Load Current
- Fully Integrated 80mΩ (R_{ds(on)}) High Side MOSFET and 42mΩ (R_{ds(on)}) Low Side MOSFET
- 1uA Shut-down Current
- 20uA Ultra Low Quiescent Current (SCT2330)
- Peak Current Mode Control with Integrated Loop Compensation
- PSM Mode in Light Load Condition (SCT2330)
- Force PWM (SCT2331)
- 4ms Soft Start Time
- Output Over Voltage Protection
- Thermal Shutdown Protection at 160°C
- Available in TSOT23-6LPackage

APPLICATIONS

- White Goods, Home Appliance
- Surveillance
- Audio, WiFi Speaker
- Printer, Charging Station
- DTV, STB, Monitor/LCD Displa

DESCRIPTION

The EV2330-B-02A Evaluation Board is designed to demonstrate the capabilities of SCT2330, SCT2331, what are 3A, EMI friendly synchronous buck converters with up to 32V wide input voltage range. The SCT2320 features an ultra-low quiescent operating current of 20uA. The SCT2330, SCT2331 is available in a low-profile SOT23-6 package.

This user's guide describes the characteristics, operation and the use of the EV2330-B-02A Evaluation Module including EVM specifications, recommended test setup, test result, schematic diagram, bill of materials, and the board layout.



Board Number	IC Number
EV2330-B-02A	SCT2330, SCT2331

PERFORMANCE SUMMARY

Table 1. Performance

Specifications are at TA = 25°C

Parameter	Condition	Value
Input Voltage	DC up to 32V	3.8V-32V
Output Voltage	PFM	5V ± 1%
Output Current	Continuous DC current	3A
Frequency	Default	400KHz

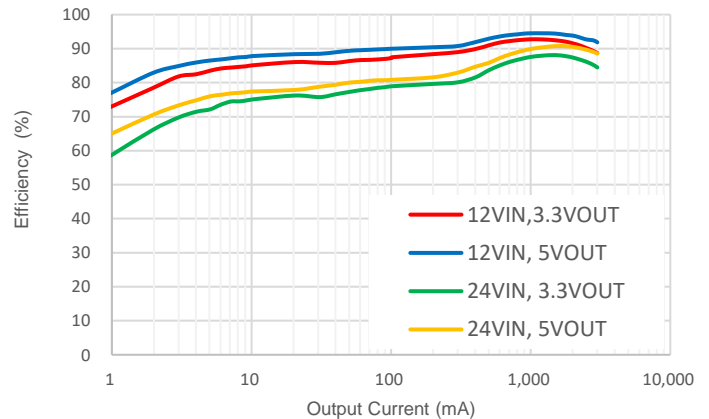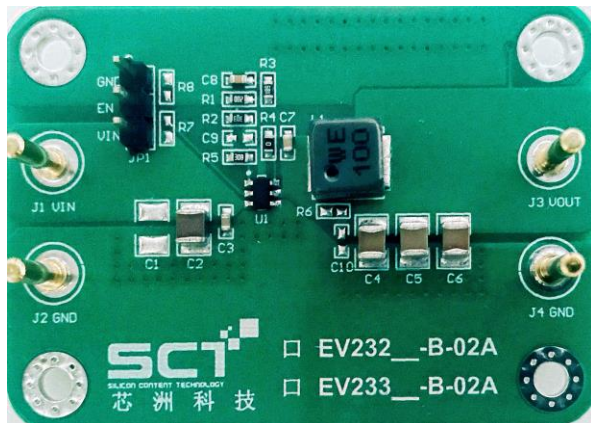

QUICK START PROCEDURE

Evaluation board EV2330-B-01A is easy to set up to evaluate the performance of the SCT2330. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Place jumpers in the following positions:
 - J1,J2: ON Connect V_{IN} supply to V_{IN} pin of IC.
 - J3,J4: ON Connect Loading to V_{OUT} pin of IC.
 - JP3: Enable. ON Connect EN pin to V_{CC} to enable IC. OFF Disable IC
2. With power off, connect the input power supply to J1 V_{IN} connector and J2 GND connector. Turn on the power at the input. Make sure that the input voltage does not exceed 32V, and supports sufficient current limit.
3. Check the output voltage at J3,J4. The output voltage should be 5V typical. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, output voltage ripple, efficiency and other parameters.
4. To use the enable function, apply a digital input to the EN pin of JP3.

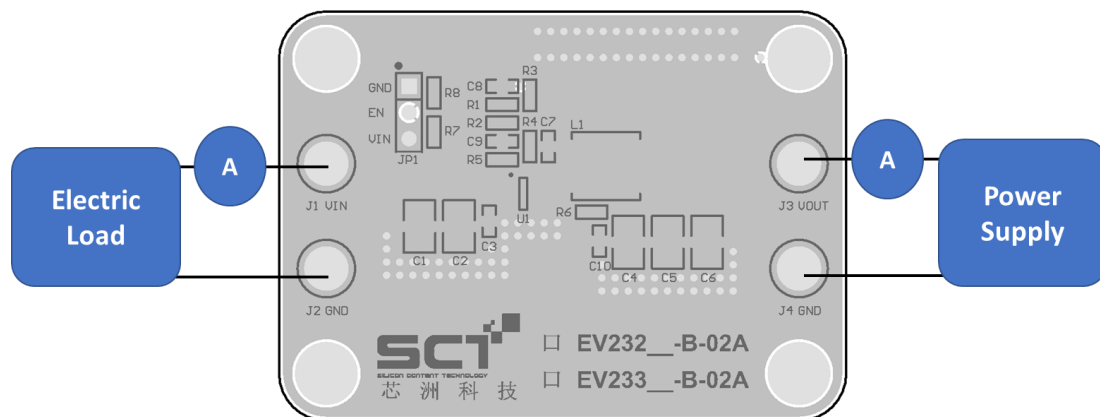


Figure 1. Proper Supply, Load and Measurement Equipment Setup

NOTE: When measuring the voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across relevant capacitor of V_{IN} or V_{OUT} . See Figure 2 for proper scope probe technique.



Figure 2. Measuring Voltage Ripple Across Terminals or Directly Across Ceramic Capacitor

SCHEMATIC DIAGRAM

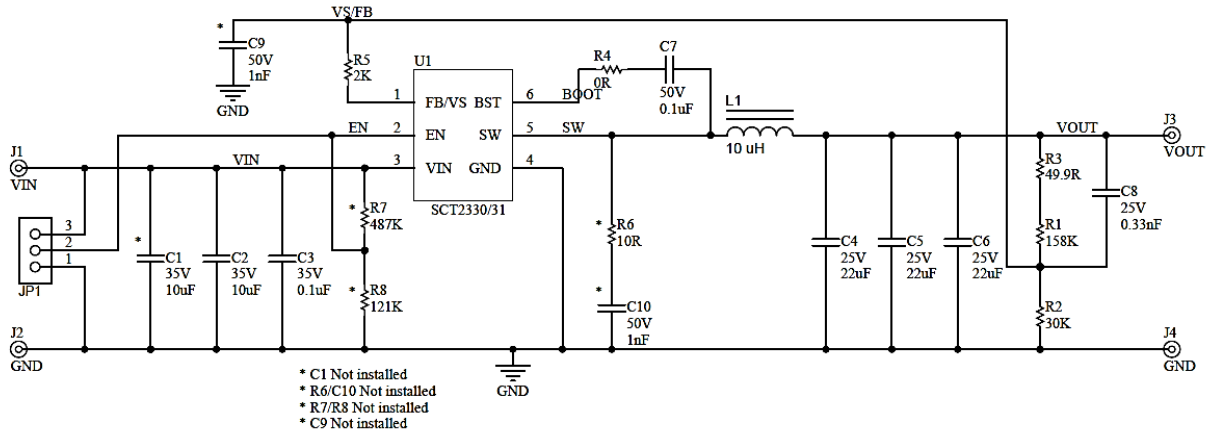


Figure 3. Evaluation Board Schematic

BILL OF MATERIALS

Table 2. Bills of Materials

Manufacture	Comment	Designator	Description	Quantity
Silicon Content Technology	SCT2330, SCT2331	U1	SCT2330,SCT2331 3.8V-32V Vin, 3A, Low Quiescent Current Synchronous Step-down Converter SOT23-6	1
Würth Elektronik	613 002 111 21	JP1	'Header, 100mil, 3x1, Tin plated, TH	1
QJJCJ	Terminal 2.1	J1, J2, J3, J4	Terminal	4
Murata Electronics	GRM32ER7YA106KA12L	C1	CAP, CERM, 10 uF, 35 V, +/- 10%, X7R, 1210	Not Installed
Murata Electronics	GRM32ER7YA106KA12L	C2	CAP, CERM, 10 uF, 35 V, +/- 10%, X7R, 1210	1
Würth Elektronik	885 012 206 095	C3, C7	CAP, CERM, 0.1 uF, 50 V, +/- 10%, X7R, 0603	2
Würth Elektronik	885 012 109 010	C4, C5, C6	CAP, CERM, 22 uF, 16V, +/-10%, X7R, 1210	3
Würth Elektronik	885 012 206 056	C8	CAP, CERM, 330 pF, 25 V, +/- 10%, X7R, 0603	1
Würth Elektronik	885 012 206 059	C9	CAP, CERM, 1000 pF, 25 V, +/- 10%, X7R, 0603	Not Installed
Würth Elektronik	885 012 206 059	C10	CAP, CERM, 1000 pF, 25 V, +/- 10%, X7R, 0603	Not Installed
Würth Elektronik	74439346100	L1	Inductor, Shielded Drum Core, WE-Superflux200, 10 u, 5 A, 0.0265 ohm, SMD	1
Vishay	CRCW060349R9FKEA	R0	RES, 49.9, 1%, 0.1 W, 0603	1
Vishay	RC0603FR-07158KL	R1	RES, 158 k, 1%, 0.1 W, 0603	1
Yageo	RC0603FR-0730K	R2	RES, 30 k, 1%, 0.1 W, 0603	1
Vishay	CRCW06030000Z0EA	R4	RES, 0, 5%, 0.1 W, 0603	1
Yageo	RC0603FR-07487KL	R7	RES, 487 k, 1%, 0.1 W, 0603	Not Installed
Yageo	RC0603FR-07121KL	R8	RES, 121 k, 1%, 0.1 W, 0603	Not Installed
Vishay	CRCW060310R0FKEA	R6	RES, 10.0, 1%, 0.1 W, 0603	Not Installed
Samsung Electro-Mechanics	RC1608F202CS	R5	RES, 2 k, 1%, 0.1W, 0603	1

PRINTED CIRCUIT BOARD LAYOUT

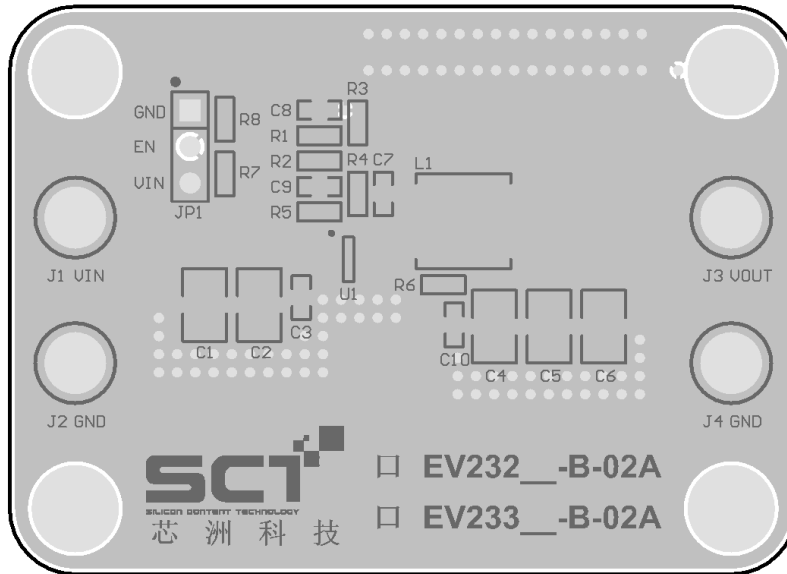


Figure 4. Top Silkscreen Layer

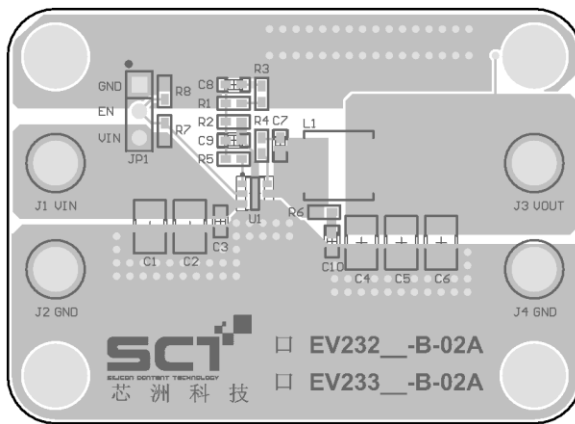


Figure 5. Top Layer

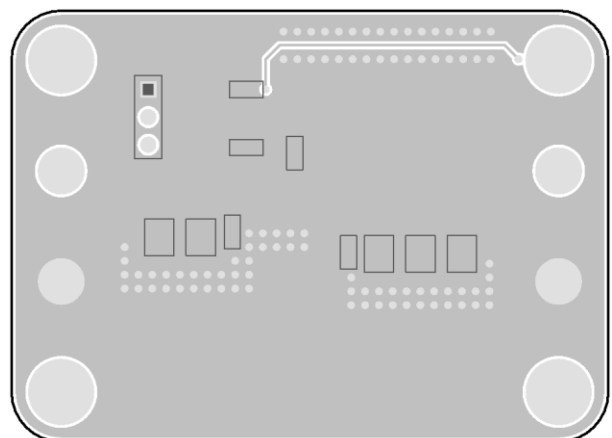


Figure 6. Bottom Layer

EVB TEST RESULTS

Vin=24V, Vout=5V, 3A loading, unless otherwise noted

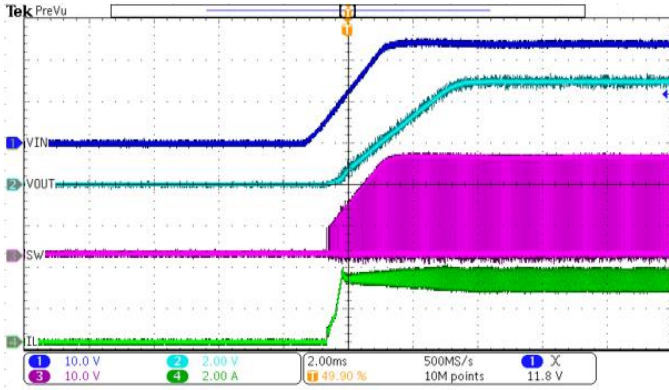


Figure 7. Power Up

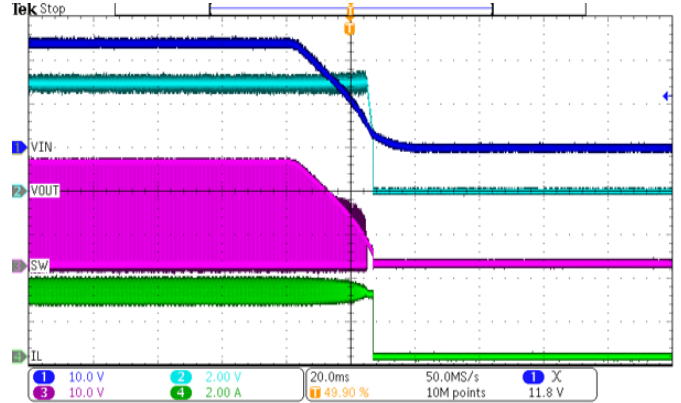


Figure 8. Power Down

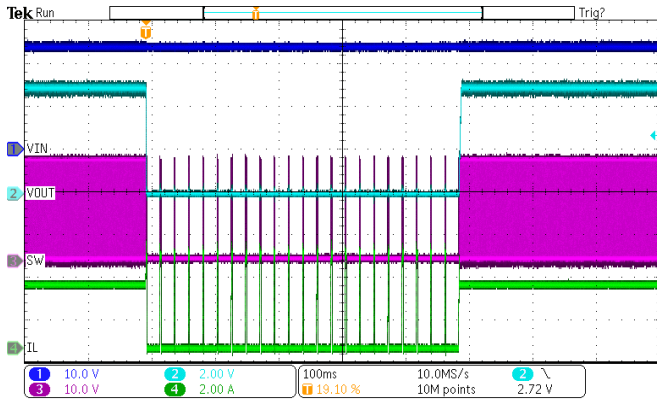


Figure 9. Output Overload and Recovery with 3A Load

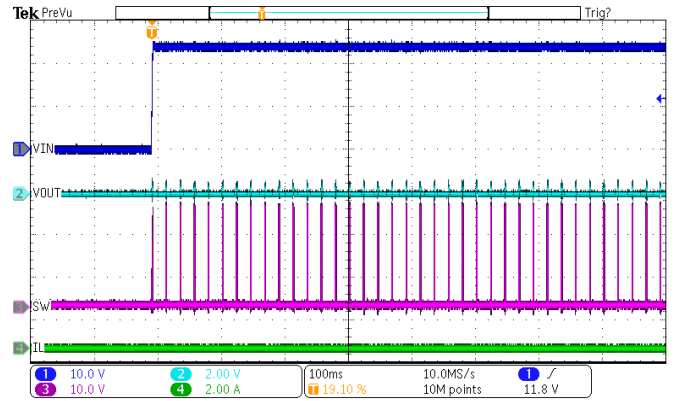


Figure 10. Startup at Output Hard-short

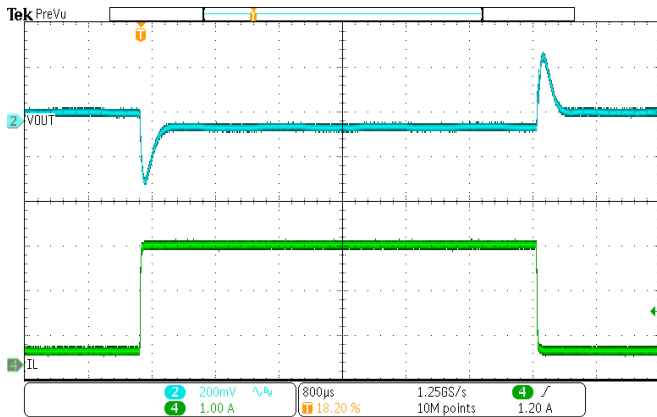


Figure 11. Load Transient
(0.3A-2.7A, SR=250mA/us)

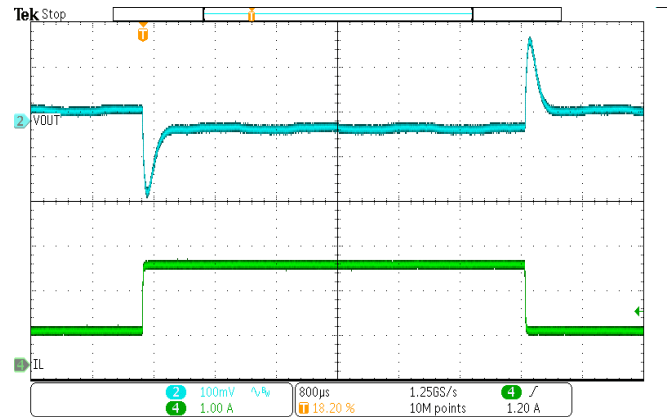


Figure 12. Load Transient
(0.75A-2.25A, SR=250mA/us)

OPTIONAL MODIFICATION

Output Voltage

The output voltage is set by an external resistor divider R1 and R2 in typical application schematic. The value of R2 can be calculated by equation 3. A minimum current of typical 20uA flowing through feedback resistor divider gives good accuracy and noise covering.

$$R_1 = \frac{(V_{OUT} - V_{REF}) \times R_2}{V_{REF}} \quad (1)$$

where:

- V_{REF} is the feedback reference voltage, typical 0.8V

Table 3. Feedback Resistor Value for Output Voltage

Vout	L1	COU _T	R1	R2	R3	R5	Cf
3.3V	6.5uH	3*22uF	93.5k	30k	49.9	2k	68p
5V	10uH	3*22uF	158k	30k	49.9	2k	100p
12V	22uH	3*22uF	422k	30k	49.9	2k	330p

*Würth Elektronik Inductor XHMI series size 6060 is considerable for application

IMPORTANT NOTICE

This evaluation board kit being sold or provided by Silicon Content Technology is intended for use for ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY and is not provided by SCT for commercial use. As such, the evaluation board herein may not be complete in terms of required design, marketing, and/or manufacturing related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases SCT from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take all appropriate precautions regarding electrostatic discharge. Also, be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.). No License is granted under any patent right or other intellectual property whatsoever. SCT assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind. Please read the Evaluation Board user's guide prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. Common sense is encouraged. This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a SCT application engineer.