

## 3.8V--32V $V_{in}$ , 2-A Synchronous Buck Converter with EM

### FEATURES

- EMI Reduction with Switching Node Ringing-free
- 500kHz Switching Frequency with 6% Frequency Spread Spectrum
- 3.8V-32V Wide Input Voltage Range
- Adjustable Output Voltage
- Up to 2A Continuous Output Load Current
- Fully Integrated 130m $\Omega$  ( $R_{dson}$ ) High Side MOSFET and 70m $\Omega$  ( $R_{dson}$ ) Low Side MOSFET
- 1uA Shut-down Current
- 20uA Ultra Low Quiescent Current
- Peak Current Mode Control with Integrated Loop Compensation
- PSM Mode in Light Load Condition
- 4ms Soft Start Time
- Output Over Voltage Protection
- Thermal Shutdown Protection at 160°C
- Available in SOP-8 Package

### APPLICATIONS



- White Goods, Home Appliance
- Surveillance
- Audio, WiFi Speaker
- Printer, Charging Station
- DTV, STB, Monitor/LCD Display

### DESCRIPTION

The EV9320-B-01A Evaluation Board is designed to demonstrate the capabilities of SCT9320, what are 2A, EMI friendly synchronous buck converters with up to 32V wide input voltage range. The SCT9320, features an ultra-low quiescent operating current of 20uA. The SCT9320 is available in a low-profile SOP-8 package.

This user's guide describes the characteristics, operation and the use of the EV9320-B-01A Evaluation Module including EVM specifications, recommended test setup, test result, schematic diagram, bill of materials, and the board layout.

Board Number	IC Number
EV9320-B-01A	SCT9320

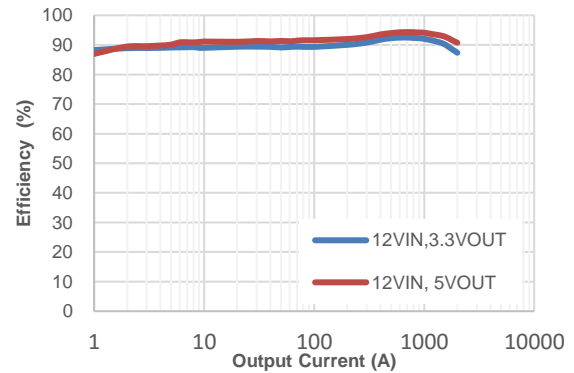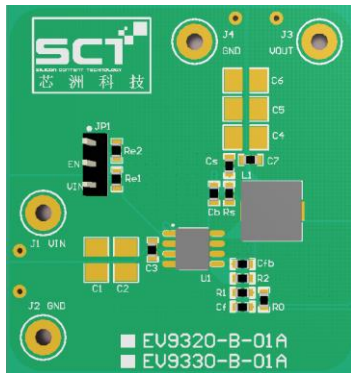

### PERFORMANCE SUMMARY

Table 1. Performance

Specifications are at  $T_A = 25^\circ\text{C}$

Parameter	Condition	Value
Input Voltage	DC up to 32V	3.8V-32V
Output Voltage	PFM	5V $\pm$ 1%
Output Current	Continuous DC current	2A
Frequency	Default	500KHz

### QUICK START PROCEDURE



## SCHEMATIC DIAGRAM

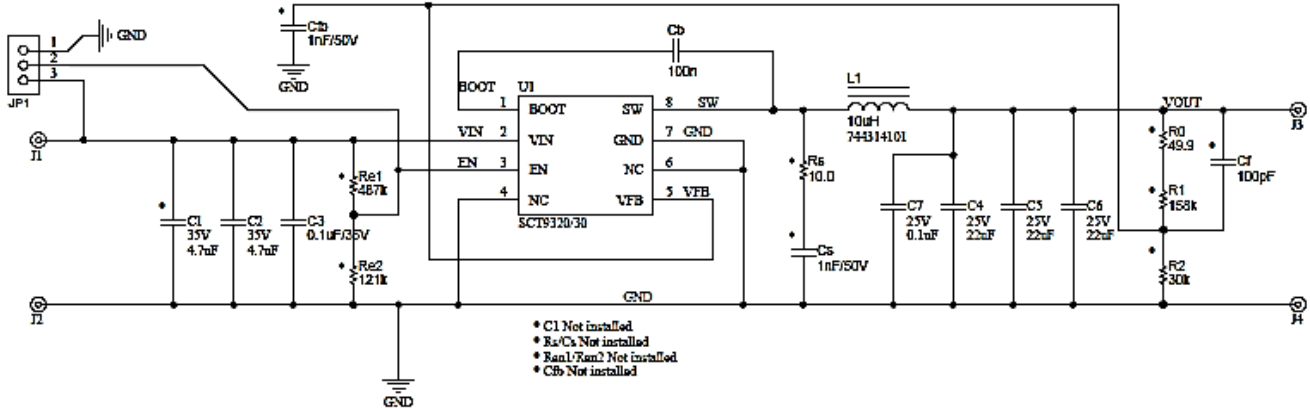


Figure 3. Evaluation Board Schematic

## BILL OF MATERIALS

Table 2. Bills of Materials

Manufacture	Comment	Designator	Description	Quantity
Silicon Content Technology	SCT9320	U1	SCT9320, 3.8V-32V <sub>in</sub> , 2A, Low Quiescent Current Synchronous Step-down Converter SOP-8	1
Wurth Elektronik	613 003 111 21	JP1	'Header, 100mil, 3x1, Tin plated, TH	1
QJJCJ	Terminal_2.1	J1, J2, J3, J4	Terminal	4
Murata Electronics	GRM32ER7YA106KA12L	C1	CAP, CERM, 10 uF, 50 V, +/- 10%, X7R, 1210	Not Installed
Murata Electronics	GRM32ER7YA106KA12L	C2	CAP, CERM, 10 uF, 50 V, +/- 10%, X7R, 1210	1
Wurth Elektronik	885 012 206 095	C3, Cb	CAP, CERM, 0.1 uF, 50 V, +/- 10%, X7R, 0603	2
Wurth Elektronik	885 012 109 010	C4, C5	CAP, CERM, 22 uF, 16V, +/-10%, X7R, 1210	2
Wurth Elektronik	885 012 109 010	C6	CAP, CERM, 22 uF, 16V, +/-10%, X7R, 1210	Not Installed
Wurth Elektronik	885 012 206 056	Cf	CAP, CERM, 68 pF, 50 V, +/- 10%, X7R, 0603	1
Murata Electronics	885 012 006 020	Cfb	CAP, CERM, 33 pF, 16 V, +/- 10%, X7R, 0603	Not Installed
Murata Electronics	GRM188R71C102KA01D	Cs	CAP, CERM, 1000 pF, 16 V, +/- 10%, X7R, 0603	Not Installed
Wurth Elektronik	744314101	L1	Inductor, Shielded Drum Core, WE-Superflux200, 10 u, 3.5 A, 0.033 ohm, SMD	1
Vishay	CRCW060349R9FKEA	R0	RES, 49.9, 1%, 0.1 W, 0603	1
Vishay	RC0603FR-07158KL	R1	RES, 158 k, 1%, 0.1 W, 0603	1
Yageo	RC0603FR-0730K	R2	RES, 30 k, 1%, 0.1 W, 0603	1
Yageo	RC0603FR-07487KL	Re1	RES, 487 k, 1%, 0.1 W, 0603	Not Installed
Yageo	RC0603FR-07121KL	Re2	RES, 121 k, 1%, 0.1 W, 0603	Not Installed
Vishay	CRCW060310R0FKEA	Rs	RES, 10.0, 1%, 0.1 W, 0603	Not Installed

### PRINTED CIRCUIT BOARD LAYOUT

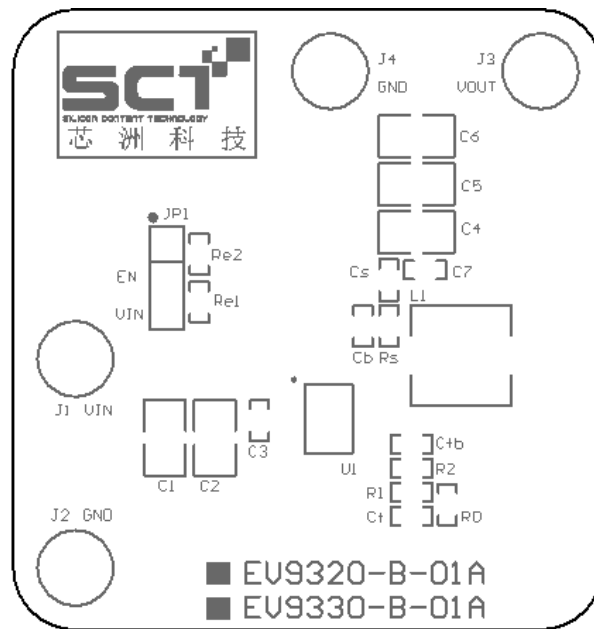


Figure 4. Top Silkscreen Layer

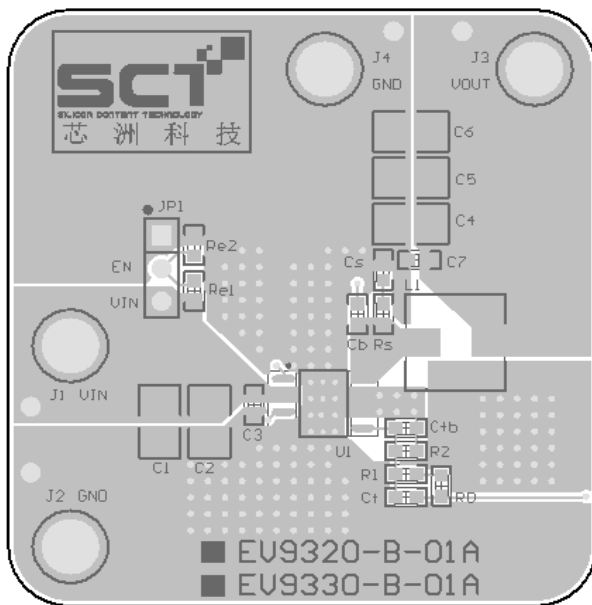


Figure 5. Top Layer

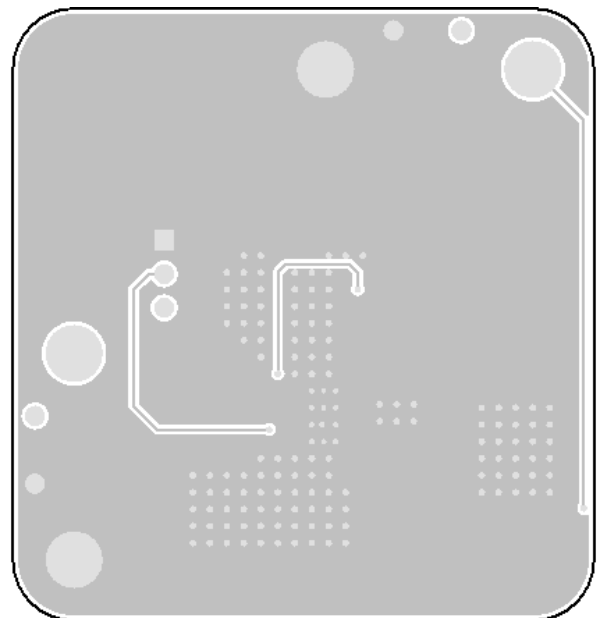


Figure 6. Bottom Layer

## EVB TEST RESULTS

$V_{in}=24V$ ,  $V_{out}=5V$ , 2A loading, unless otherwise noted

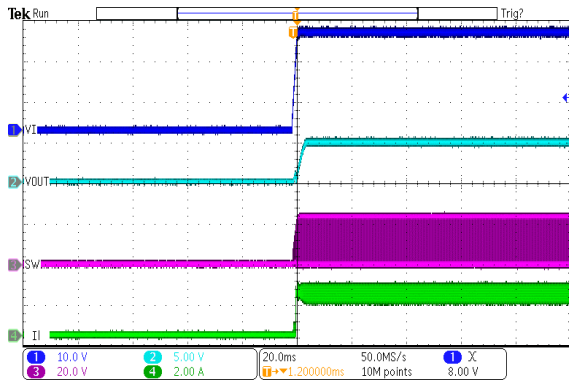


Figure 6. Power Up

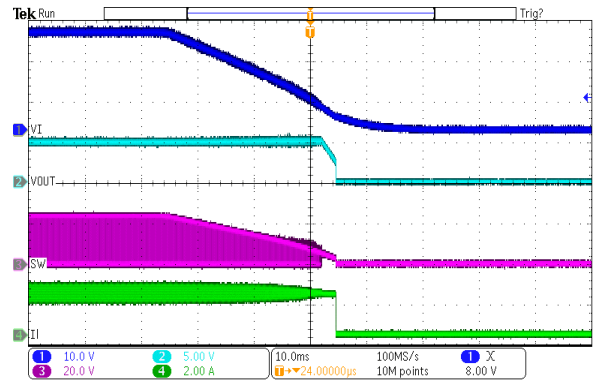


Figure 7. Power Down

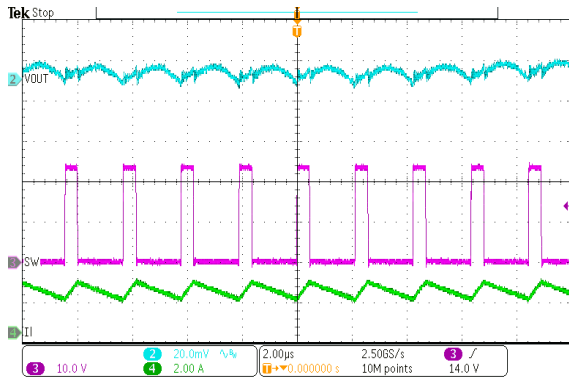


Figure 8. SW node waveform and Output Ripple  
 $V_{in}=24V$ ,  $I_{out}=2A$

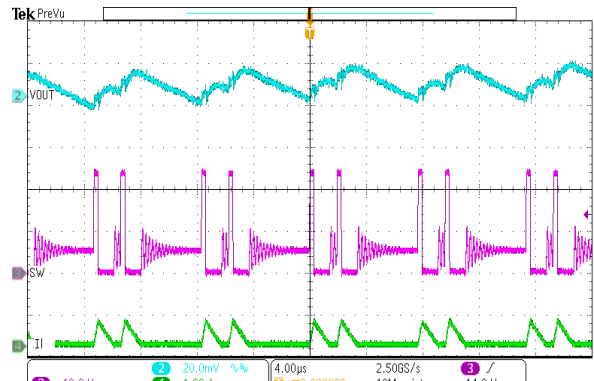


Figure 9. Power Down  
 $V_{in}=24V$ ,  $V_{out}=5V$ ,  $I_{out}=2A$

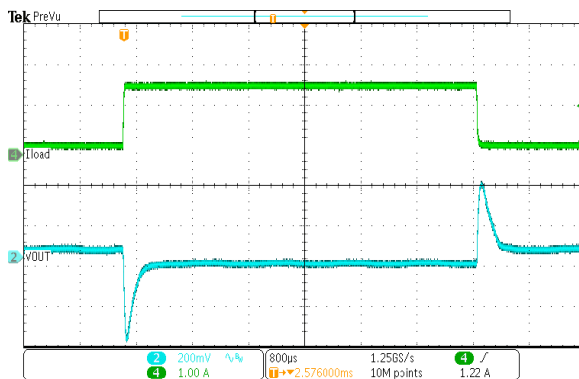


Figure 10. Load Transient  
 $V_{out}=5V$ ,  $I_{out}=0.2A$  to  $1.8A$ ,  $SR=250mA/\mu s$

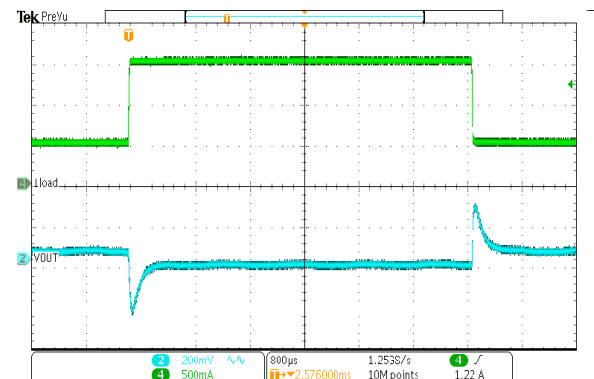


Figure 11. Load Transient  
 $V_{out}=5V$ ,  $I_{out}=0.5A$  to  $1.5A$ ,  $SR=250mA/\mu s$

## OPTIONAL MODIFICATION

### Output Voltage

The output voltage is set by an external resistor divider R1 and R2 in typical application schematic. The value of R2 can be calculated by equation 3. A minimum current of typical 20uA flowing through feedback resistor divider gives good accuracy and noise covering.

$$R_1 = \frac{(V_{OUT} - V_{REF}) \times R_2}{V_{REF}} \quad (3)$$

where:

- V<sub>REF</sub> is the feedback reference voltage, typical 0.8V

**Table 5. Feedback Resistor R<sub>1</sub> R<sub>2</sub> Value for Output Voltage  
(Room Temperature)**

V <sub>OUT</sub>	R <sub>1</sub>	R <sub>2</sub>
3.3 V	31.6k	10.2k
5 V	53.6k	10.2k
12 V	143k	10.2k

## **IMPORTANT NOTICE**

This evaluation board kit being sold or provided by Silicon Content Technology is intended for use for ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY and is not provided by SCT for commercial use. As such, the evaluation board herein may not be complete in terms of required design, marketing, and/or manufacturing related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases SCT from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take all appropriate precautions regarding electrostatic discharge. Also, be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.). No License is granted under any patent right or other intellectual property whatsoever. SCT assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind. Please read the Evaluation Board user's guide prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. Common sense is encouraged. This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a SCT application engineer.